

**HITACHI**  
Inspire the Next

# PROJECTING

a brighter future for all




# A Projector to suit every need




## ■ Portable Projectors

Whether you are on the move or in an office, Hitachi's portable projectors are perfect for today's mobile professionals. They combine simple usability with powerful performance in a light weight and compact design enabling users to set up their presentations in seconds.

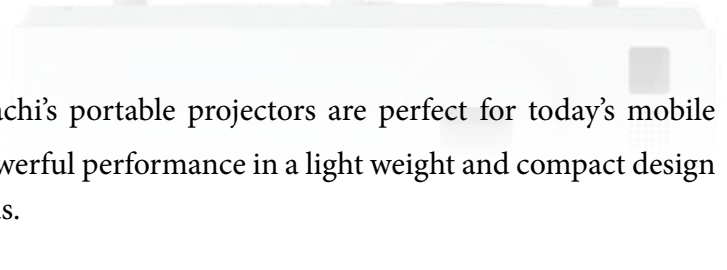

## ■ Multi Purpose Projectors

Our Multi Purpose range contains the finest features for business and education. Whichever model you choose, you'll find top-of-the range picture quality, security and networking, in a user-friendly package. Hitachi is dedicated to protecting the environment and save energy so the range also features longer-life parts and energy-saving settings.

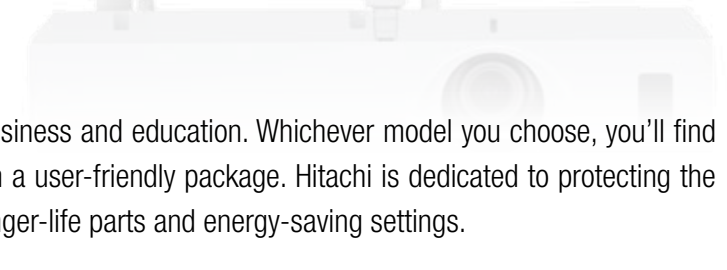

## ■ Short Throw Projectors

Project large, bright images in tight spaces with Hitachi's Short Throw Projectors. These lightweight and compact projectors are perfect for small and medium sized meeting rooms. They are easy to install and flexible to use with optional wireless networking, providing an affordable solution for both business settings and education settings.












## ■ Ultra Short Throw Projectors

Hitachi Ultra Short Throw projectors help you get the most out of your presentations or lessons. These lightweight and compact projectors offer the highest quality images with a compelling design. You can project onto any existing whiteboard, wall or table top. They are also easy to install and flexible to use with optional wireless networking.



## ■ Professional & Installation Projectors



Ideal for medium to large venues, our installation models deliver high performance, advanced networking capabilities and simple user functionality making them a cost effective solution for a multitude of installation requirements.

			Portable Series										
													
Model Name			CP-DX300 / CP-DX301ES	CP-DX351ES	CP-DH300ES	CP-RX250EF	ED-27X	CP-EX250EF / CP-EX251N	CP-EX301N	CP-EX401EF			
Display	Light Source		Lamp										
	LCD Panel / DLP Chip		0.55" DLP		0.65" DLP	0.63" 3LCD			0.63" 3LCD				
	Resolution (colour pixels)		XGA		FHD	XGA							
	Brightness (ANSI Lumens)		3,000	3,500	3,000	2,700			3,200	4,200			
	Contrast Ratio		2500:1 / 10000:1	10000:1	2000:1								
	Throw Ratio (distance width)		1.86 - 2.04:1 / 1.96 - 2.15:1	1.96 - 2.15:1	1.15 - 1.5	1.5 - 1.8:1		1.5 - 1.8:1					
	Projection lens		Zoom			Manual x 1.1		Manual x 1.2					
		Focus		Manual									
Features	ACCENTUALIZER		-										
	HDCR		-										
	Image Optimizer		-										
	Edge Blending		-										
	Warping		-										
	Lens Shift		-										
	Perfect fit		-										
	Network LAN Wireless IEEE802.11b/g/n (optional USB wireless adapter is required.)		-										
	PC-Less Interactive		-										
	PC-Less Presentation		-										
	PC-Less Installation		-										
	Stacking		-										
	Picture Mode		-			Yes							
Picture by Picture		-											
Picture in Picture		-											
Numerical Information	Expected Lamp Life (hrs)		Normal	4,500	3,500	4,000	5,000						
			Eco2 (Eco)	6,000	5,000	5,000	6,000			10,000			
	Lamp Wattage (W)			196	200	210	215			225			
	Expected Filter Life (hrs)			-			5,000	2,000		5,000			
	Speakers Output			2W		2W	1W	-	1W	16W	1W		
	Acoustic Noise Level (dB)		Normal	33	36	34	37			37			
			Eco1 (Eco)	29	30	29	29			32			
			Eco2	-							29		
	Power Supply		AC110-120V/AC220-240V, 50/60Hz										
Power Consumption			196W / 250W	290W	270W	320W		320W	330W				
Dimensions W x H x D, mm (excluding protrusion)			314.6 x 89.1 x 208		265 x 81.5 x 223		320 x 85 x 245						
Weight (kg)			2.3	2.4	2.2	3		2.9	3				
Terminals	PC	Input	15-pin mini D-sub	x2			x1		x2				
		Output	BNC				-						
	Video	Input	HDBaseT	-									
			3G SDI in/out	-									
			Display Port	-									
			HDMI (HDCP compliant)	x1			-		x1				
			DVI	-									
			S-Video Mini DIN 4 pin	x1			-						
			Composite Video RCA jack	x1			-		x1				
	Component Video 15-pin D-sub	x2 (shared computer 1/2)			-		x2 (shared computer 1/2)						
	Audio	Input	3.5 mm Stereo mini jack	x1			-		x2		-		
			RCA jack (L/R)	-			-		x1				
		Output	3.5 mm Stereo mini jack	x1			-		x1		-		
	RCA jack (L/R)	-			-		x1	-		x1			
Mic	Input	3.5mm mono mini	-										
Control	Network LAN Wired	RJ-45	-					Yes		-			
	USB	Type A/B	-					Type B x 1		-			
	RS232C Control	9-pin D-sub	x1										
Compatibility	Signals	Computer	VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, UXGA, MAC 16"										
	Video Inputs		NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM, 480i, 480p, 576i										
Languages			21				33						
Replacement Parts	Lamp		DT01461 / DT01851	DT01853	DT01463	DT01431	DT01431	DT01433	DT01481	DT01481			
	Filter		-	-	-	UX38841	UX38851	UX38851	UX38841	UX38841			
	Remote Control		HL02961	HL02961	HL02961	HL02881	HL02881	HL02881	HL03031	HL03031			

**Multi Purpose Series**



CP-X3030WN	CP-X2541WN	CP-X3041WNEF	CP-X4030WNEF	CP-WX3041WN	CP-WX3541WNEF	CP-X5022WNGF	CP-WX4022WNGF
Lamp							
0.59" 3LCD	0.63" 3LCD		0.63" 3LCD	0.59" 3LCD	0.59" 3LCD		0.63" 3LCD
1024 x 768		1024 x 768		1280 x 800		1024 x 768	1280 x 800
3200	2,700	3,200	4,200	3,000	3,700	5,000	4,000
4000:1	10000:1		5000:1	10000:1		3000:1	
1.5-1.8:1			1.5 - 1.8:1			1.5 - 2.5:1	
Manual x 1.2				Manual x 1.7			
Manual							
Yes				-			
Yes				-			
Yes				-			
-				-			
-				-			
-				Manual			
Yes				-			
Yes				-			
-				-			
Yes				-			
-				-			
-				-			
-				Yes			
Yes				-			
-				-			
-				-			
5,000 hrs	5,000 hrs		5,000 hrs		3,000		3,000
6,000 hrs	10,000 hrs		10,000 hrs		5,000		5,000
215		225		245		245	
5,000							
16W x 1				8W x 2			
37dB				36			
29dB				30			
29				-			
AC110-120V/AC220-240V, 50/60Hz							
215W	330W		350W		350W		
320 x 85 x 245		401 x 103 x 318					
3		4.6		4.6			
x2		x1					
-		x1					
x1		x1					
-		-					
-		-					
x2		x1					
-		-					
x1		x1					
x1		x1					
x 2 (shared computer 1/2)		x1					
x2							
x1		x1					
x1		-					
-		x1					
x1							
Yes							
Type A x 2, Type B x 1				Type A x 2, Type B x 1			
x1		x1					
VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, UXGA, MAC 16"							
NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM, 480i, 480p, 576i, 720p, 1080i, 1080p							
33							
DT01431	DT01481	DT01481	DT01481	DT01481	DT01481	DT01171	DT01171
UX38841	UX38841	UX38841	UX38841	UX38841	UX38841	MU07791	MU07791
HL02881	HL03031	HL03031	HL03031	HL03031	HL03031	HL02881	HL02881

								
Model Name			CP-CX251N	CP-CX301WN	CP-CW251WN	CP-CW301WN	CP-A222NM	
Display	Light Source		Lamp				0.63" 3LCD	
	LCD Panel / DLP Chip		0.63" 3LCD		0.59" 3LCD		0.63" 3LCD	
	Resolution (colour pixels)		XGA		WXGA		XGA	
	Brightness (ANSI Lumens)		1024 x 768		1280 x 800		1024 x 768	
	Contrast Ratio		2,500	3,100	2,600	3,100	2,200	
	Throw Ratio (distance width)		2000:1		10,000:1		4000:1	
	Throw Ratio (distance width)		0.6:1	0.6:1	0.6:1		0.3:1	
Projection lens	Zoom	n/a (Digital x 1.35)				n/a (Digital x 1.35)		
	Focus	Manual				Powered		
Features	ACCENTUALIZER		-			Yes	Yes	
	HDCR		-			Yes	Yes	
	Image Optimizer		-			Yes	Yes	
	Edge Blending					-		
	Warping					-		
	Lens Shift					-		
	Perfect fit				-		Yes	
	Network LAN Wireless IEEE802.11b/g/n (optional USB wireless adaptor is required.)		-			Yes		
	PC-Less Interactive					-		
	PC-Less Presentation					Yes		
	PC-Less Installation					-		
	Stacking					-		
	Picture Mode					Yes		
	Picture by Picture					-		
	Picture in Picture					-		
Numerical Information	Expected Lamp Life (hrs)	Normal	5,000			4,500		
		Eco2 (Eco)	10,000			5,500		
	Lamp Wattage (W)		225			225		
	Expected Filter Life (hrs)		4,000			4,000		
	Speakers Output		1W x 1	16W x 1				
	Acoustic Noise Level (dB)	Normal	36			34		
		Eco1 (Eco)	32			32		
		Eco2	29			28		
	Power Supply		AC110-120V/AC220-240V, 50/60Hz					
	Power Consumption		300W	340W			330W	
Dimensions W x H x D, mm (excluding protrusion)		345 x 85 x 303			345 x 85 x 303			
Weight (kg)		3.4	3.6			3.8		
Terminals	PC	Input	15-pin mini D-sub		x 2		x 2	
		Output	BNC		-			
	Video	Input	15-pin mini D-sub		x 1			
			HDBaseT		-			
			3G SDI in/out		-			
			Display Port		-			
			HDMI (HDCP compliant)		x 1	x 2		x 2
			DVI		-			
			S-Video Mini DIN 4 pin		x 1		-	
			Composite Video RCA jack		x 1		-	
	Component Video 15-pin D-sub		x 2		-			
	Audio	Input	3.5 mm Stereo mini jack		x 2		x 1	
			RCA jack (L/R)		x 1			
		Output	3.5 mm Stereo mini jack		-		x 1	
	Mic	Input	RCA jack (L/R)		x 1			
3.5mm mono mini			-		Mono mini X 1 ( Compatible with dynamic microphones & unbalanced signal lines)			
Control	Network LAN Wired	RJ-45		Yes		RJ 45X1		
	USB	Type A/B		Type A x 1	Type A x 2, (for pc-less presentation or wireless adaptor), USB Type B X 1(for USB Display or USB mouse control)			
	RS232C Control	9-pin D-sub		x 1				
Compatibility	Signals	Computer					VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, UXGA, MAC 16"	
	Video Inputs						NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM, 480i, 480p, 576i, 720p, 1080i, 1080p	
Languages							33	
Replacement Parts	Lamp	DT01511				DT01381		
	Filter	UX37191 (Hybrid)				UX37191		
	Remote Control	HL03031	HL03035			HL02651		

Ultra Short Throw Series	Interactive Ultra Short Throw Series
--------------------------	--------------------------------------



CP-AX2505EF	CP-AX3005EF	CP-AX3505EF	CP-AW2505EF	CP-AW3005EF	CP-TW2505EF	CP-TW3005EF
-------------	-------------	-------------	-------------	-------------	-------------	-------------

Lamp						
0.63" 3LCD			0.59" 3LCD		0.59" 3LCD	
XGA			WXGA			
1024 x 768			1280 x 800			
2,700	3,300	3,600	2,700	3,300	2,700	3,300
10000:1						
0.3:1						
n/a (Digital x 1.35)						
Powered						
Yes						
Yes						
Yes						
-						
-						
-						
Yes						
Yes						
-					Yes	
Yes					-	
-					Yes	
-						
-						
-						
5,000	4,000		5,000	4,000	5,000	4,000
10,000	6,000		10,000	6,000	10,000	6,000
225	250	250	225	250	225	250
4,000						
16W				8W x 2 (stereo)		
34	36		34	36	34	36
32	32		32	32	32	32
28	29		28	29	28	29
AC110-120V/AC220-240V, 50/60Hz						
330W	360W	360W	330W	360W	350W	360W
377 x 136 x 360					377 x 136 x 360	
4.3					4.4	
x 2						
-						
x 1						
-						
-						
-						
x 2						
-						
-						
x 1						
x 2						
x 1						
x 1						
x 1						
-						
x 1						
Yes						
Type A x 2, Type B x 1						
x 1						
VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, UXGA, MAC 16"						
NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM, 480i, 480p, 576i, 720p, 1080i, 1080p						
33						
DT01511	DT01411	DT01411	DT01511	DT01411	DT01511	DT01411
UX37191 (Hybrid)					UX37191 (Hybrid)	
HL03033					HL03033	



Model Name			CP-X8150YGF	CP-X8160YGF	CP-X8170GF
Display	Light Source				
	LCD Panel / DLP Chip		0.63" 3LCD	0.79" 3LCD	0.79" 3LCD
	Resolution (colour pixels)		XGA 1024 x 768		
	Brightness (ANSI Lumens)		5,000	6,000	7,000
	Contrast Ratio		3000:1	3000:1	3000:1
	Throw Ratio (distance width)		1.5-2.2:1	1.5-3.0:1	
	Projection lens	Zoom			
	Focus				
Features	ACCENTUALIZER		-	-	Yes
	HDCR				
	Image Optimizer				
	Edge Blending				
	Warping				
	Lens Shift				
	Perfect fit				
	Network LAN Wireless IEEE802.11b/g/n (optional USB wireless adapter is required.)				
	PC-Less Interactive				
	PC-Less Presentation				
	PC-Less Installation				
	Stacking				
	Picture Mode				
	Picture by Picture		-		
	Picture in Picture		-	Yes	
Numerical Information	Expected Lamp Life (hrs)	Normal	2,500		2,000
		Eco2 (Eco)	4,000	3,000	2,500
	Lamp Wattage (W)		245	330	365
	Expected Filter Life (hrs)		15,000	20,000	20,000
	Speakers Output		8W x 2 (stereo)		-
	Acoustic Noise Level (dB)	Normal	35	37	39
		Eco1 (Eco)	29	31	33
		Eco2			
	Power Supply				
	Power Consumption		375W	480W	500W
Dimensions W x H x D, mm (excluding protrusion)		498 x 135 x 396			
Weight (kg)		8.4	8.8		
Terminals	PC	Input	15-pin mini D-sub		
		Output	BNC	x 1	
	Video	Input	HDBaseT		
			3G SDI in/out		
			Display Port		
			HDMI (HDCP compliant)		
			DVI		
			S-Video Mini DIN 4 pin		
			Composite Video RCA jack		
	Component Video 15-pin D-sub	x 1 (shared computer in 1)			
	Audio	Input	3.5 mm Stereo mini jack	x 1	
			RCA jack (L/R)		
Output		3.5 mm Stereo mini jack			
	RCA jack (L/R)				
Mic	Input	3.5mm mono mini			
Control	Network LAN Wired	RJ-45			
	USB	Type A/B			
	RS232C Control	9-pin D-sub			
Compatibility	Signals	Computer	VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+,		
		Video Inputs			
Languages					
Replacement Parts	Lamp	DT01281	DT01291	DT01471	
	Filter	MU06642	UX38241	UX38242	
	Remote Control	HL02801	HL02801	HL02801	







Model Name			CP-X8800	CP-WX8650	CP-WX8750	CP-WU8600	CP-WU8700	
Display	Light Source		Lamp					
	LCD Panel / DLP Chip		0.79" 3LCD	0.75" 3LCD	0.75" 3LCD	0.75" 3LCD	0.76" 3LCD	
	Resolution (colour pixels)		XGA 1024 x 768	WXGA 1280 x 800		WUXGA 1920 x 1200		
	Brightness (ANSI Lumens)		8,000	6,500	7,500	6,000	7,000	
	Contrast Ratio		10000:1	10000:1	10000:1	10000:1	10000:1	
	Throw Ratio (distance width)		Lens not Included					
	Projection lens	Zoom	Powered					
Focus		Powered						
Features	ACCENTUALIZER		Yes					
	HDCR		Yes					
	Image Optimizer		Yes					
	Edge Blending		Yes					
	Warping		Yes					
	Lens Shift		Powered					
	Perfect fit		Yes					
	Network LAN Wireless IEEE802.11b/g/n (optional USB wireless adapter is required.)		Yes					
	PC-Less Interactive		-					
	PC-Less Presentation		-					
	PC-Less Installation		-					
	Stacking		Yes					
	Picture Mode		Yes					
	Picture by Picture		Yes					
Picture in Picture		Yes						
Numerical Information	Expected Lamp Life (hrs)	Normal	3,000					
		Eco2 (Eco)	4,000					
	Lamp Wattage (W)		430	370	430	370	430	
	Expected Filter Life (hrs)		20,000					
	Speakers Output		8W x 2 (stereo)					
	Acoustic Noise Level (dB)	Normal	37	35	37	35	37	
		Eco1 (Eco)	31	30	31	30	31	
		Eco2	-					
	Power Supply		AC110-120V/AC220-240V, 50/60Hz					
	Power Consumption		600W	580W	600W	580W	600W	
Dimensions W x H x D, mm (excluding protrusion)		498 x 170 x 456						
Weight (kg)		11.1 (excluding lens)						
Terminals	PC	Input	15-pin mini D-sub	x 1				
		Output	BNC	-				
	Video	Input	HDBaseT	x 1				
			3G SDI in/out	-	x 1			
			Display Port	x 1				
			HDMI (HDCP compliant)	x 2				
			DVI	-				
			S-Video Mini DIN 4 pin	-				
			Composite Video RCA jack	x 1				
			Component Video 15-pin D-sub	-				
	Audio	Input	3.5 mm Stereo mini jack	x 1				
			RCA jack (L/R)	x 1				
		Output	3.5 mm Stereo mini jack	x 1				
			RCA jack (L/R)	-				
	Mic	Input	3.5mm mono mini	-				
	Control	Network LAN Wired	RJ-45	Yes				
USB		Type A/B	Type A x 1					
RS232C Control		9-pin D-sub	x 1					
Compatibility	Signals	Computer	VGA,SVGA,XGA,WXGA,WXGA+, SXGA,SXGA+,UXGA,MAC 16",WSXGA+,WUXGA					
	Video Inputs		NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM, 480i, 480p, 576i, 720p, 1080i, 1080p					
Languages		33						
Replacement Parts	Lamp	DT01881	DT01871	DT01881	DT01871	DT01881		
	Filter	UX40821						
	Remote Control	HL02805						

\* Coming soon

Professional & Installation Series



CP-X9110	CP-WX9210	CP-HD9320	CP-HD9950B	CP-WU9410	CP-WU9100B	CP-WU13K	LP-WU9750B+
Lamp						Laser	
0.7" DLP	0.65" DLP	0.65" DLP	0.65" DLP	0.67" DLP	0.67" DLP	0.96" 3DLP	0.67" DLP
XGA	WXGA	FHD	FHD	WUXGA		WUXGA	WUXGA
1024 x 768	1280 x 800	1920 x 1080	1920 x 1080	1920 x 1200		1920 x 1200	1920 x 1200
10,000	8,500	8,200	9,500	8,500	10,000	13,000	7,500
2000:1	2500:1	2500:1	2500:1	2500:1	2500:1	2000:1	10000:1
Lens not included							
Powered							
Powered							
Yes						-	
Yes						-	
-		Yes		-		Yes	
Yes							
Yes						Yes	
Powered							
Yes						-	
Yes						-	
-							
-							
-							
Yes						-	
Yes						-	
Yes							
Yes							
2,000		4,000		2,000		4,000	
4,000		3,000		4,000		3,000	
370 x 2		365 x 2		430 x 2		370 x 2	
15,000						430 x 2	
						465 x 2	
						1,000	
-							
36				38		46	
29				33		42	
-							
AC110-120V/AC220-240V, 50/60Hz							
1060W		1090W		1060W		1090W	
						1250W	
						TBD	
537 x 170 x 438						522 x 295 x 661	
16.6 (excluding lens)						34 (excluding lens)	
						29 (excluding lens)	
x1							
x1		-		-		x1	
x1						-	
x1						-	
-		x1/-		-		x1/-	
-							
x2						x2	
x1							
-							
-							
x1 (shared computer in 1)						x1	
-							
-							
-							
-							
-							
Yes							
Type A x 1						-	
x1							
VGA, SVGA, XGA, WXGA/WXGA+/SXGA, SXGA+/WSXGA+/UXGA/WUXGA (compressed), MAC 16"						VGA, SVGA, XGA, SXGA, SXGA+, WXGA, UXGA, MAC 16"	
NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM, 480i, 480p, 576i, 720p, 1080i, 1080p							
33						9	
9						9	
DT01581	DT01581	DT01731	DT01911	DT01581	DT01911	DT01591	-
UX39551	UX39551	UX39551	UX39551	UX39551	UX39551	UX39951	-
HLO2803	HLO2803	HLO2803	HLO2803	HLO2803	HLO2803	HLO3051	TBD

## 8000 SERIES INTERCHANGEABLE LENS OPTIONS (700 SERIES LENS)

Projection Distance For Optional Lenses (when projecting onto a 100" diagonal screen)\*

					
Model	FL-701 (Fixed)	SL-702 (x1.5)	ML-703 (x2.0)	LL-704 (x1.7)	UL-705 (x1.7)
CP-X8150	82.6"(2.1m)	122.0"-181.1" (3.1-4.6m)	153.5"-303.1" (3.9-7.7m)	287.4"-488.1" (7.3-12.4m)	488.1"-830.7" (12.4-21.1m)
CP-X8160	66.9"(1.7m)	98.4"-145.6" (2.5-3.7m)	122.0"-244.0" (3.1-6.2m)	232.2"-303.7" (5.9-10.0m)	393.7"-665.3" (10.0-16.9m)
CP-X8170	66.9"(1.7m)	98.4"-145.6" (2.5-3.7m)	122.0"-244.0" (3.1-6.2m)	232.2"-393.7" (5.9-10.0m)	393.7"-665.3" (10.0-16.9m)
CP-WX8240	86.6"(2.2m)	125"-192.0" (3.2-4.9m)	161.4"-318.8" (4.1-8.1m)	307.0"-519.6" (7.8-13.2m)	515.7"-877.9" (13.1-22.3m)
CP-WX8255	70.9"(1.8m)	102.3"-153.5" (2.6-3.9m)	129.9"-255.9" (3.3-6.5m)	244.0"-413.3" (6.2-10.5m)	413.3"-704.7" (10.5-17.9m)
CP-WX8265	70.9"(1.8m)	102.4"-153.5" (2.6-3.9m)	129.9"-255.9" (3.3-6.5m)	244.0"-413.3" (6.2-10.5m)	413.3"-704.7" (10.5-17.9m)
CP-WU8440	70.9"(1.8m)	98.4"-149.6" (2.5-3.8m)	125.9"-251.9" (3.2-6.4m)	240.1"-405.5" (6.1-10.3m)	405.5"-692.9" (10.3-17.6m)
CP-WU8451	70.9"(1.8m)	98.4"-149.6" (2.5-3.8m)	125.9"-251.9" (3.2-6.4m)	240.1"-405.5" (6.1-10.3m)	405.5"-692.9" (10.3-17.6m)
CP-WU8461	70.9"(1.8m)	98.4"-149.6" (2.5-3.8m)	125.9"-251.9" (3.2-6.4m)	240.1"-405.5" (6.1-10.3m)	405.5"-692.9" (10.3-17.6m)

					
Model	FL-701 (Fixed)	SL-712 (x1.5)	ML-713 (x1.7)	LL-704 (x1.7)	UL-705 (x1.7)
CP-X8800	67"(1.7m)	97"-145" (2.5-3.7m)	139"-237" (3.5-6.0m)	231"-392" (5.9-10.0m)	393"-667" (10.0-16.9m)
CP-WX8650	71"(1.8m)	102"-154" (2.6-3.9m)	146"-249" (3.7-6.3m)	244"-415" (6.2-10.5m)	415"-705" (10.5-17.9m)
CP-WX8750	71"(1.8m)	102"-154" (2.6-3.9m)	146"-249" (3.7-6.3m)	244"-415" (6.2-10.5m)	415"-705" (10.5-17.9m)
CP-WU8600	69"(1.7m)	100"-151" (2.5-3.8m)	143"-244" (3.6-6.2m)	240"-407" (6.1-10.3m)	407"-691" (10.3-17.6m)
CP-WU8700	69"(1.7m)	100"-151" (2.5-3.8m)	143"-244" (3.6-6.2m)	240"-407" (6.1-10.3m)	407"-691" (10.3-17.6m)

## 9000 SERIES INTERCHANGEABLE LENS OPTION (900 SERIES LENS)

Projection Distance For Optional Lenses (when projecting onto a 100" diagonal screen)\*

								
Model	FL-910** (Fixed)	USL-901 (x1.3)	SL-902 (x1.5)	SD-903W (x1.5)	SD-903X (x1.5)	ML-904 (x1.5)	LL-905 (x1.6)	UL-906 (x1.6)
CP-X9110	32"(0.80m)	67"-84" (1.7-2.1m)	98"-146" (2.5-3.7m)	-	136"-205" (3.5-5.2m)	200"-306" (5.1-7.8m)	291"-471" (7.4-12.0m)	462"-732" (11.7-18.6m)
CP-WX9210	34"(0.85m)	71"-88" (1.8-2.2m)	105"-156" (2.7-4.0m)	147"-220" (3.7-5.6m)	-	216"-329" (5.5-8.3m)	314"-506" (8.0-12.9m)	496"-786" (12.6-20.0m)
CP-HD9320	33"(0.83m)	69"-86" (1.8-2.2m)	103"-153" (2.6-3.9m)	143"-215" (3.6-5.5m)	-	211"-322" (5.4-8.2m)	307"-495" (7.8-12.6m)	485"-769" (12.3-19.5m)
CP-HD9950B	33"(0.83m)	69"-86" (1.8-2.2m)	103"-153" (2.6-3.9m)	143"-215" (3.6-5.5m)	-	211"-322" (5.4-8.2m)	307"-495" (7.8-12.6m)	485"-769" (12.3-19.5m)
CP-WU9410	32"(0.81m)	67"-84" (1.7-2.1m)	100"-149" (2.5-3.8m)	140"-209" (3.5-5.3m)	-	205"-313" (5.2-7.9m)	298"-482" (7.6-12.2m)	472"-749" (12.0-19.0m)
CP-WU9100B	32"(0.81m)	67"-84" (1.7-2.1m)	100"-149" (2.5-3.8m)	140"-209" (3.5-5.3m)	-	205"-313" (5.2-7.9m)	298"-482" (7.6-12.2m)	472"-749" (12.0-19.0m)

## CP-WU13K INTERCHANGEABLE LENS OPTION (K1 SERIES LENS)

Projection Distance For Optional Lenses (when projecting onto a 200" diagonal screen)\*

						
Model	FL-K01 (Fixed)	FL-K02 (Fixed)	SL-K03 (x1.3)	ML-K04 (x1.3)	LL-K05 (x1.6)	UL-K06 (x1.6)
CP-WU13K	119" (3.0m)	245" (5.0m)	241"-323" (6.1-8.2m)	321"-438" (8.2-11.1m)	437"-709" (11.1-18.0m)	708"-1183" (18.0-30.0m)

\* Projection Distance: Projector's front panel to screen (except FL-910)  
Lens front end to screen for FL-910

\*\*FL-910 includes lens mount bracket

## OPTIONAL ACCESSORIES

Category	Model Name	Mounting Accessory	Other Accessories
Portable	CP-DX301/CP-DX300ES CP-DX351ES	HAS-X301 Bracket for fixing mount HAS-204L Standard adapter for fixing mount HAS-304H Long adapter for fixing mount	-
	CP-RX250EF ED-27X CP-EX250EF CP-EX301N CP-EX401EF CP-X3030WN	HAS-EX300 Bracket for fixing mount HAS-204L Standard adapter for fixing mount HAS-304H Long adapter for fixing mount	-
	CP-DH300ES	-	-
Multi Purpose	CP-X2541WN CP-X3041WNEF(H) CP-WX3041WN CP-X4030WNEF CP-WX3541WNEF	HAS-EX300 Bracket for fixing mount HAS-204L Standard adapter for fixing mount HAS-304H Long adapter for fixing mount	USB-WL-11N USB wireless adapter
	CP-X5022WNGF(H) CP-WX4022WNGF(H)	HAS-3010 Bracket for fixing mount HAS-204L Standard adapter for fixing mount HAS-304H Long adapter for fixing mount	USB-WL-11N USB wireless adapter
Short Throw	CP-CX251N		-
	CP-CX301WN CP-CW251WN CP-CW301WN	HAS-P100 Fixing adapter for high ceiling HAS-203L Fixing adapter for low ceiling HAS-AW100 Bracket for ceiling mount	USB-WL-11N USB wireless adapter
Ultra Short Throw	CP-AX2505EF CP-AX3005EF CP-AX3505EF CP-AW2505EF CP-AW3005EF		
Ultra Short Throw Interactive	CP-TW2505EF CP-TW3005EF	HAS-WM03/HAS-WM05 Wall Mount unit TT-03 Table top use kit HAS-P100 Fixing adapter for high ceiling HAS-203L Fixing adapter for low ceiling HAS-AW100 Bracket for ceiling mount	USB-WL-11N USB wireless adapter HAS-RB01 Receiver bracket for Apple TV I-PEN4 Interactive Pen (CP-TW2505EF, CP-TW3005EF) FT-01B Finger Touch Unit (CP-TW2505EF, CP-TW3005EF)
Professional & Installation	CP-X8150YGF CP-X8160YGF CP-X8170GF CP-WX8240YGF CP-WX8255YGF CP-WX8265GF CP-SX8350YGF CP-WU8440YGF CP-WU8451YGF CP-WU8461GF	HAS-8150 Bracket for fixing mount HAS-204L Standard adapter for fixing mount HAS-304H Long adapter for fixing mount	
	CP-X8800 CP-WX8650 CP-WX8750 CP-WU8600 CP-WU8700	HAS-8150 Bracket for fixing mount HAS-204L Standard adapter for fixing mount HAS-304H Long adapter for fixing mount	USB-WL-11N USB wireless adapter
	CP-X9110 CP-WX9210 CP-HD9320 CP-HD9950B CP-WU9410 CP-WU9100B	HAS-9110 Bracket for fixing mount HAS-204L Standard adapter for fixing mount HAS-304H Long adapter for fixing mount	
	CP-WU13K	HAS-13K Bracket for ceiling mount FS-13K Frame for stacking	-

# HITACHI

Inspire the Next

**Hitachi India Pvt Ltd.**

Units 305-306, 3rd Floor, DLF Tower-A, Jasola District Centre, New Delhi-110025, India

For more information visit : [www.hitachiconsumer.com/in](http://www.hitachiconsumer.com/in), [www.hitachi.co.in](http://www.hitachi.co.in)

or Call : 18001020092 (Toll Free) / 011-40605235, 45515500 or E-mail : [sales@hitachi.co.in](mailto:sales@hitachi.co.in)